

HOTRON

DOOR ACTIVATION SENSOR




HR942D



Two Row Motion and Presence Detection


Dimensions

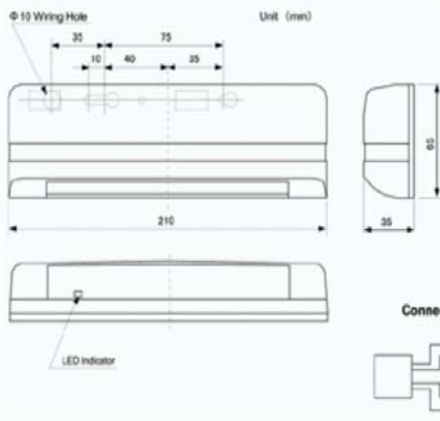



Model	HR942D (Motion & Presence)
Detection Method	Active Infrared Detection
Installation Height	Max 3000 mm
Pattern Adjustments	Wide or Narrow Pattern Width (Mask Dial) Angle adjustment θ to 10° in 6 steps 1 to 2 Rows Pattern Depth (Dip Switches)
Presence Timer	2, 15, 60, 180 sec.
Power Supply	12 to 32V AC or DC $\pm 40\%$
Power Consumption	AC24V-2VA, AC12V-1.5VA DC24V-55mA, DC12V-85mA
Output Contact	Relay contact: DC50V 0.1A (Resistance Load) Yellow Cable: Close when detecting
Output Holding Time	Approx. 0.5 sec.
Indication	Power on: Green = ON Detecting: Red = ON Self Diagnostic Functio : Red/Green = Flashing
Temperature Range	-20°C to $+60^\circ\text{C}$
Weight	Approx. 200g
Color	Black & Silver
Accessories	Connection Cable Mounting Template Mounting Screws Installation Instructions

NOTE: Specifications may change without prior notice

Detection Area

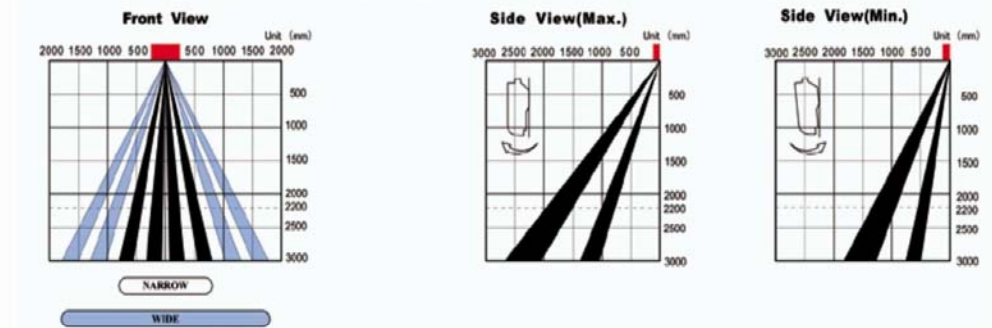

Width Adjustment

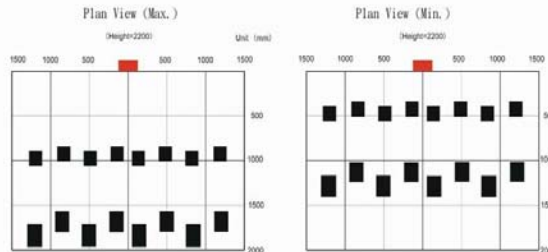

MADE IN JAPAN

PT. CITRA AMANTOSA SEJATI

Phone : 021-5308435, 5323403, 5350058

E-mail : amantosa@cas.co.id

Kebon Jeruk Baru, Ruko blok A-15, Jakarta 11530

Fax : 021-5308434

Web-site : <http://www.cas.co.id>