



FEATURES

Not Handed:

Hand is reversible by turning latch bolt after front is dismantled unlike conventional Mortise Lock which requires changing by removing out case cover.

Perfect connection of cylinder and thumb turn are fixed to lock body by setting pins, thus prevents wrench off.

Jimmy Proof Strong Dead Bolt.


The throw of dead bolt is 17.5mm, and is insured with hardened steel saw proof bar.

SPECIFICATIONS

Backset	50mm.
For Doors	30mm to 35mm thick and 36mm to 44m thick.
Cylinder	5 pin tumbler. Can be masterkeyed or grand masterkeyed. Construction key system available. (available with 6 pin tumbler and X-Key cylinders.)
Keys	Brass.
Spacing	65mm.
Front	Stainless steel, satin finish.
Case	Wrought Steel, zinc-dichromate plated and chronek-dipped.
Dead Bolt	Solid brass, polished, reinforced by steel bar.
Latch Bolt	Zinc die-cast, nickel plated.
Cylinder Collar	Stainless steel, double, satin finish.
Thumb Turn	Zinc die-cast, dull chrome plated.
Strike	Stainless steel, satin finish.
Lever	Cast aluminum.
Rose	Wrought aluminum.
Finish	Anodised aluminum: silver, amber and black.

LOCATION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION
Entrance	05			Lock or unlock by key from outside, by thumb turn from inside.
Passage	15			From both sides by lever handles. No dead bolt.
Entrance	26			Lock or unlock by key from both sides.
Store Room	35			Lock or unlock by key from outside only.
Patio or Exit	63			Lock or unlock by thumb turn from inside only.

HOW TO ORDER (Example)
CL-05-UL1-SLV-40W

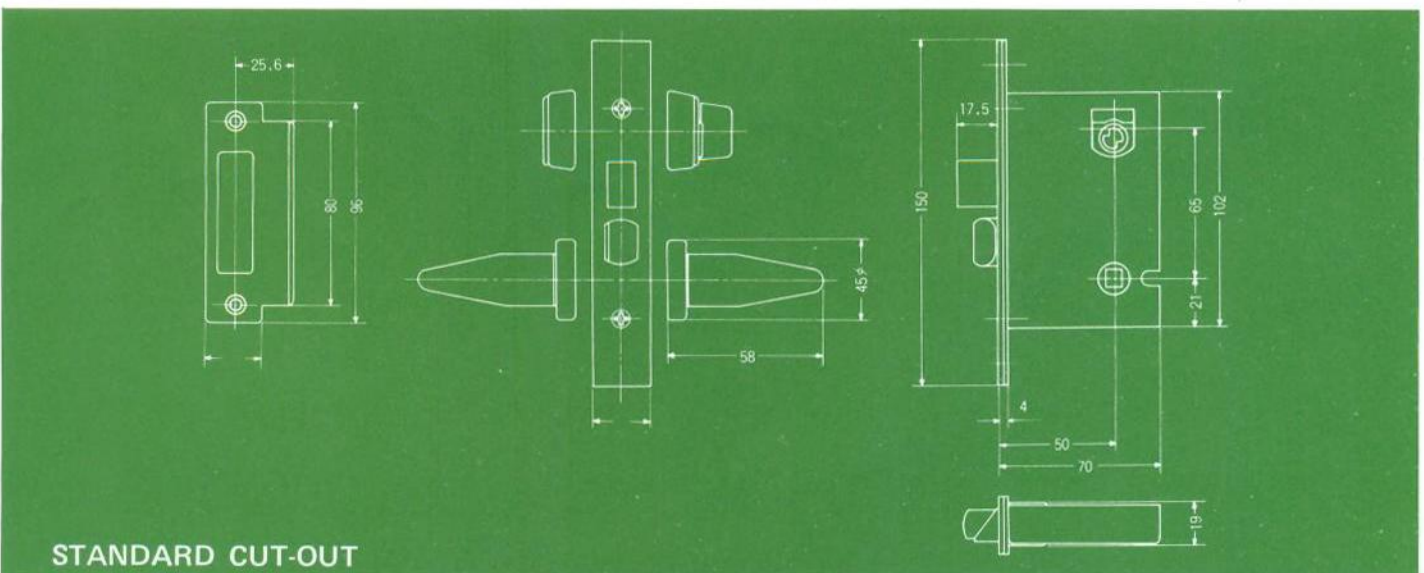




FEATURES

Not Handed:
Hand is reversible by turning latch bolt after front is dismantled.

SPECIFICATIONS

Backset	30mm and 50mm.
For Doors	30mm to 35mm thick and 36mm to 45mm thick.
Front	Stainless steel, satin finish.
Case	Wrought steel, zinc-dichromate plated and chronek-dipped.
Latch Bolt	Zink die-cast, nickel plated.
Strike	Stainless steel, satin.
Lever	Cast aluminum.
Rose	Wrought aluminum.
Finish	Anodized aluminum: silver, amber and black.

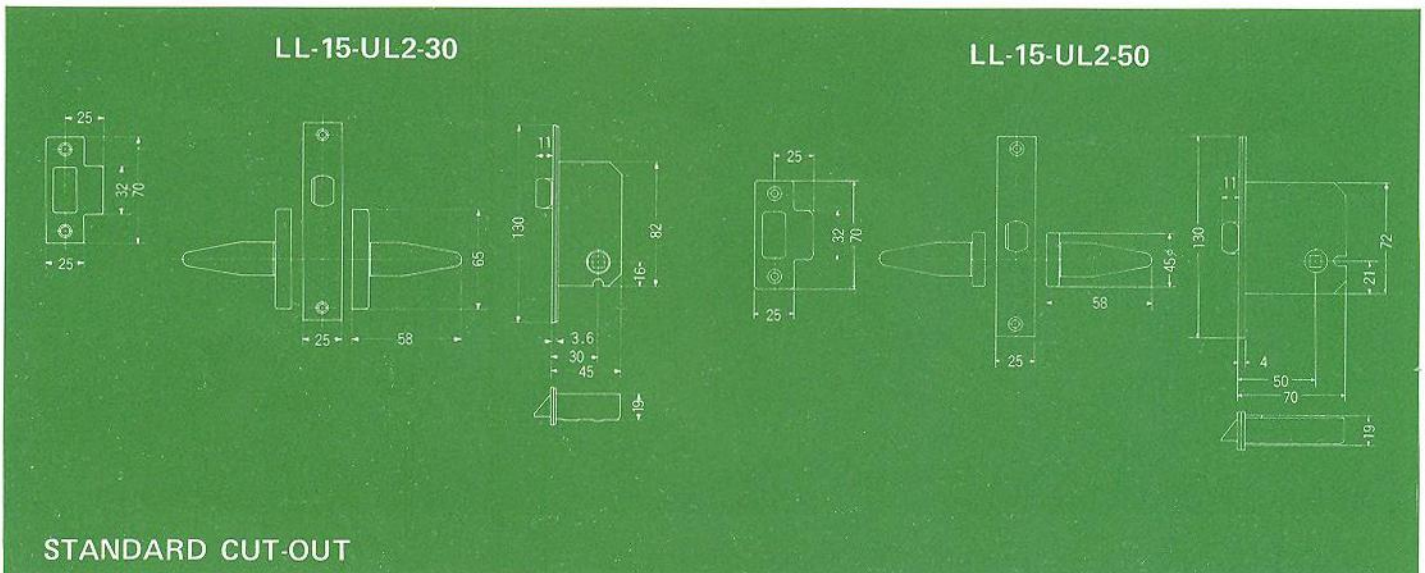










HOW TO ORDER (Example)
LL-15-UL3-SLV-40W



STANDARD CUT-OUT

LEVER HANDLE DESIGNS

ROSE DESIGNS

<p>UL-1</p>  <p>110mm center of spindle to end 60mm projection</p>	<p>UL-2</p>  <p>107mm center of spindle to end 58mm projection</p>	<p>UL-3</p>  <p>110mm center of spindle to end 58mm projection</p>	<p>Backset 30mm</p> 
<p>UL-4</p>  <p>105mm center of spindle to end 72mm projection</p>	<p>UL-5</p>  <p>112mm center of spindle to end 57mm projection</p>	<p>UL-6</p>  <p>102mm center of spindle to end 64mm projection</p>	<p>Backset 50mm</p> 
<p>UL-7</p>  <p>112mm center of spindle to end 68mm projection</p>	<p>UL-8</p>  <p>110mm center of spindle to end 57mm projection</p>	<p>UL-9</p>  <p>107mm center of spindle to end 62mm projection</p>	