










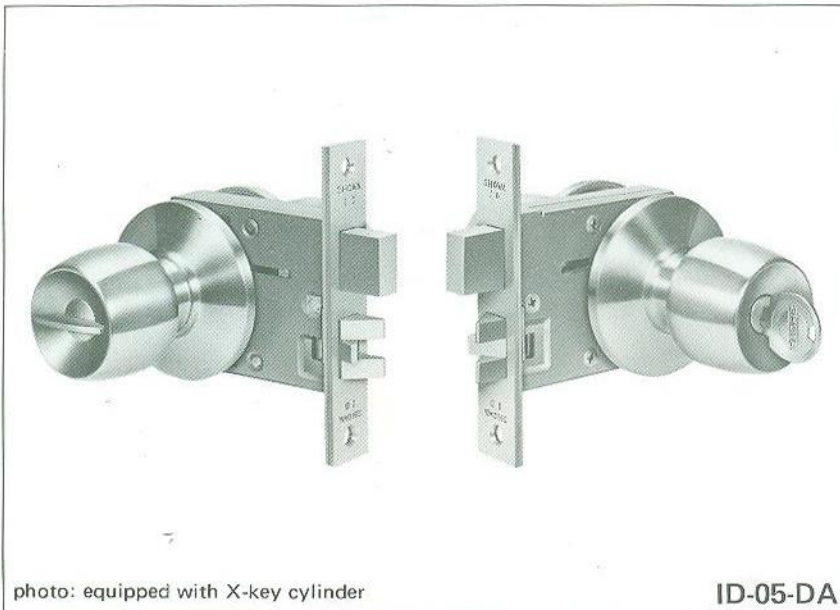


INTEGRAL LOCK

FUNCTION CHART

LOCATION	Function NO.	Outside	Inside	FUNCTION DESCRIPTION	SERIES		
					ID	ISD	IS
Entrance	05			Dead bolt from outside by key, from inside by thumb turn. Latch bolt by both knobs.	●	●	●
Passage	15			From both sides by knobs. No dead bolt.	●	●	●
	15-2H			From both sides by case handles. No dead bolt.	●	●	●
	15-H*			From inside by knob. From outside by case handle. No dead bolt.	●	●	●
Entrance	26			Latch bolt by both knobs. Dead bolt from both sides by key. Key on either side locks or unlocks.	●	●	●
Closet or Store Room	35			Latch bolt by both knobs. No unlocking from inside when dead bolt is thrown by key from outside.	●	●	●
	35-*H			Latch bolt from outside by knob, from inside by case handle. No unlocking from inside when dead bolt is thrown by key from outside.	●	●	●
Patio or Exit	63			Latch bolt by both knobs. Dead bolt from inside by thumb turn only. No key operation.	●	●	●
	63-H*			Latch bolt from inside by knob, from outside by case handle. Dead bolt from inside by thumb turn only. No key operation.	●	●	●
Bathroom	65			Latch bolt by both knobs. Dead bolt from inside by thumb turn. Emergency opening from outside.	●	●	●
Toilet or Bathroom	68			Latch bolt by both knobs. Dead bolt from inside by thumb turn. Emergency opening from outside. Occupancy indicated by turning thumb turn. (A type knob only)			●

NOTE: H ... Case handle. Thus, 2H means handle on both sides.
 * ... Optional knob. Select one among A.N. or K. Knobs.
 (Refer to page 4.)




SPECIFICATIONS


For Doors	30mm to 41mm thick and 42mm to 50mm thick.
Backset	70mm.
Lock Case	Steel, zinc-dichromate plated and chronek-dipped.
Front	Stainless steel, satin finish.
Strike	Stainless steel, satin finish.
Dead Bolt	Solid brass, dull chrome plated.
Latch Bolt	Solid brass, dull chrome plated.
Cylinder	6 pin tumbler. Can be masterkeyed or grand masterkeyed. Construction key system available. (available with X-Key cylinders.)
Keys	Nickel silver.
Knob & Rose	Stainless steel, satin finish. Laminated wood knob available.

NOTE: Specify HAND when ordering.

HOW TO ORDER (Example)

ID-05-DA-MK-40W-LH

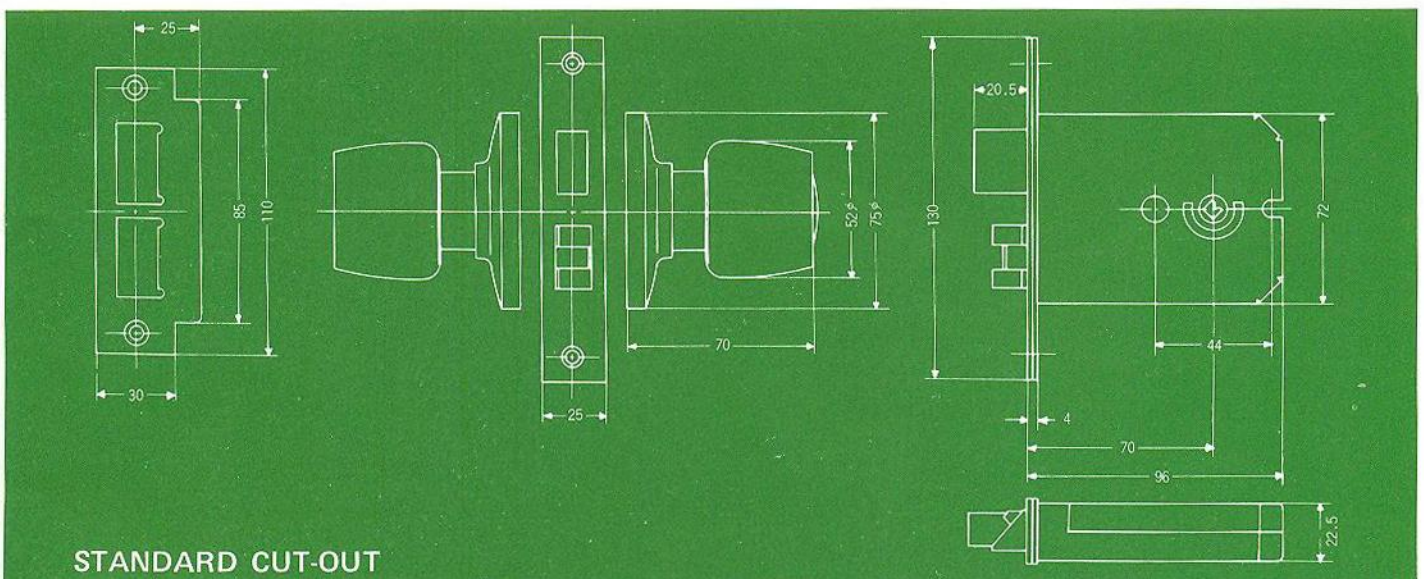

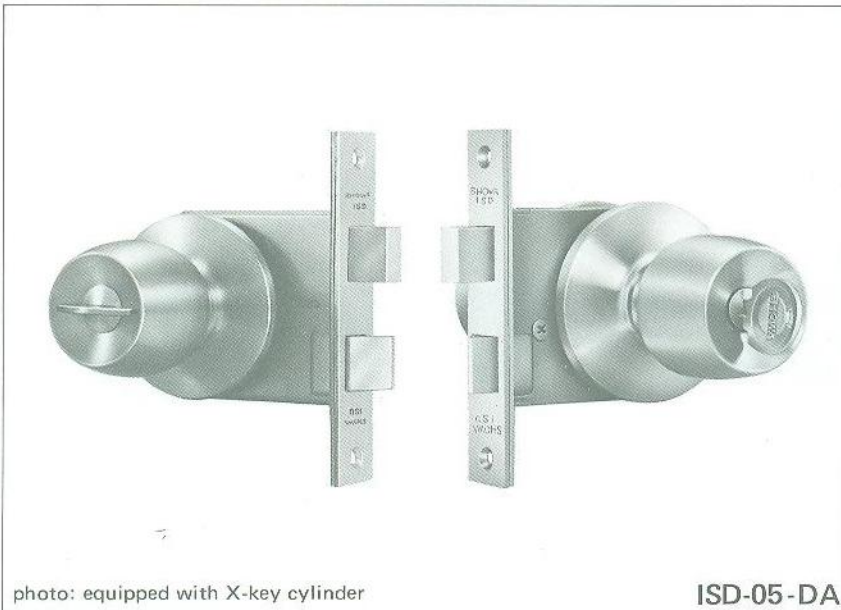


SPECIFICATIONS

Four Doors	30mm to 41mm thick and 42mm to 50mm thick.
Backset	60mm, 64mm, 90mm and 100mm.
Lock Case	Steel, zinc-dichromate plated and chronek-dipped.
Front	Stainless steel, satin finish.
Strike	Stainless steel, satin finish.
Dead Bolt	Solid brass, dull chrome plated.
Latch Bolt	Solid brass, dull chrome plated.
Cylinder	6 pin tumbler. Can be masterkeyed or grand masterkeyed. Construction key system available. (available with X-Key cylinders.)
Keys	Nickel silver.
Knob & Rose	Stainless steel, satin finish. Laminated wood knob available.

NOTE: Specify HAND when ordering.

HOW TO ORDER (Example)

ISD-05-DA-60-MK-36W-RH

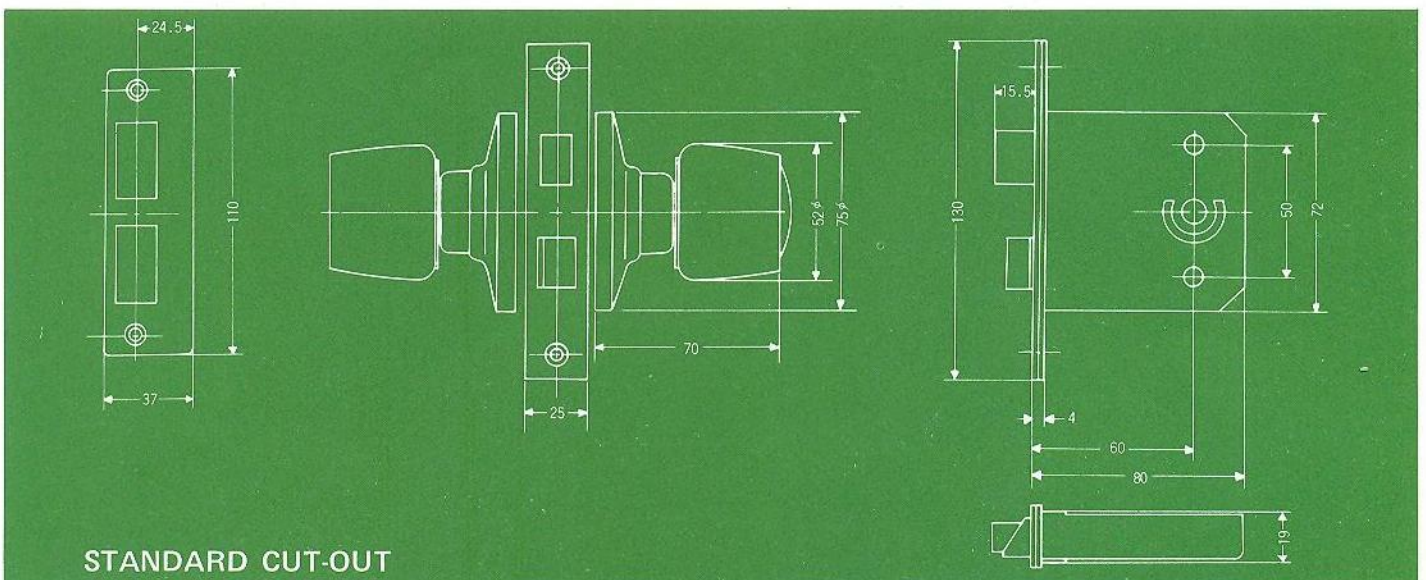



IS-05-DA


SPECIFICATIONS

For Doors	25mm to 29mm thick, 30mm to 39mm thick and 40mm to 52mm thick.
Backset	60mm, 64mm, 90mm and 100mm.
Lock Case	Steel, zinc-dichromate plated and chronek-dipped.
Front	Stainless steel, satin finish.
Strike	Stainless steel, satin finish.
Dead Bolt	Solid brass, satin finish.
Latch Bolt	Solid brass, satin finish.
Cylinder	5 pin tumbler. Can be masterkeyed or grand masterkeyed. (Available with X-key cylinders.)
Keys	Brass.
Knob & Rose	Stainless steel, satin finish. Laminated wood knob available.

NOTE: Specify HAND when ordering.

HOW TO ORDER (Example)

IS-05-DA-60-36W-LH

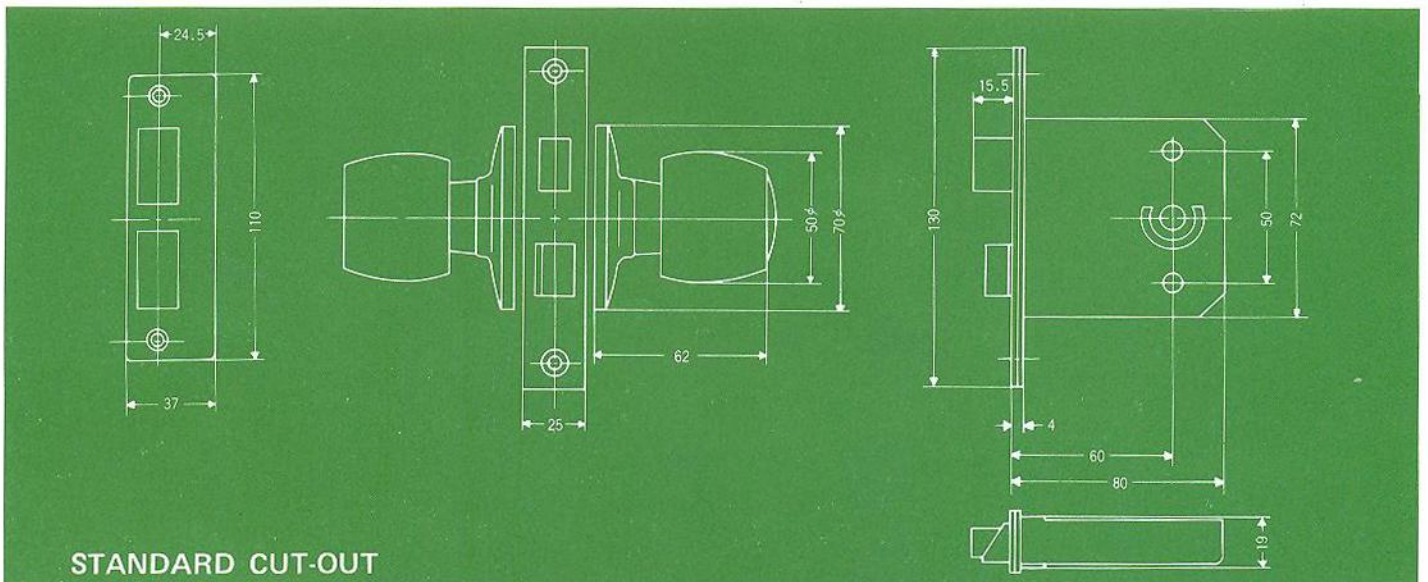

STANDARD CUT-OUT